

Physical Features

Model	GZY-R3012
Size	30(L) x 12(W)x 1.25(H)mm
Material	PET/Aluminum Foil/Foam
Colour	White
Working Temp	-40~+85
Storage Temp	-40~+120
Installation Methods	3M Adhesive
Package details	500pcs Per roll/Small box,2000pcs/Carton
Weight	0.85kg/Reel

RFID Features


Protocol Standard	EPC CLASS1 GEN2, ISO 18000-6C
Working Frequency	865-868Mhz, 902-928Mhz(Customized)
Chip Type	NXP Ucode 8, 9 Impinj M730 Monza R6-P(Customized)
EPC Memory	96-128bit, TID:64bit
Read distance	0.1-0.9m, On Metal Surfaces (depend on reader performance)
Re-Write	>100,000times
Data Storage	>10 years

Others Features


Application	<ul style="list-style-type: none"> ● IT Asset Management ● Warehouse Management ● Medical Laboratory Equipment ● Automotive Components Tracking
Optional customization	Surface laser, printing LOGO, serial number, Encoding, etc
Support Printer	Postek TX3r, SATO CL4NX, Zebra ZT410, etc.
IP Rating	IP68

Focus On RFID Solutions


Dimensions:(mm)

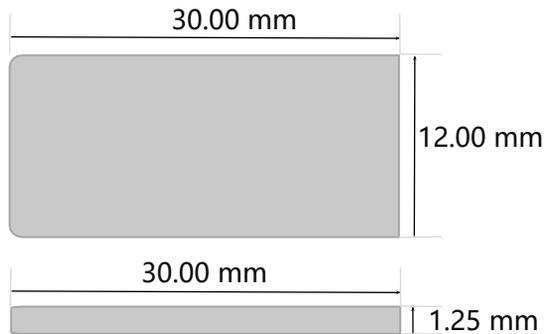

US Test

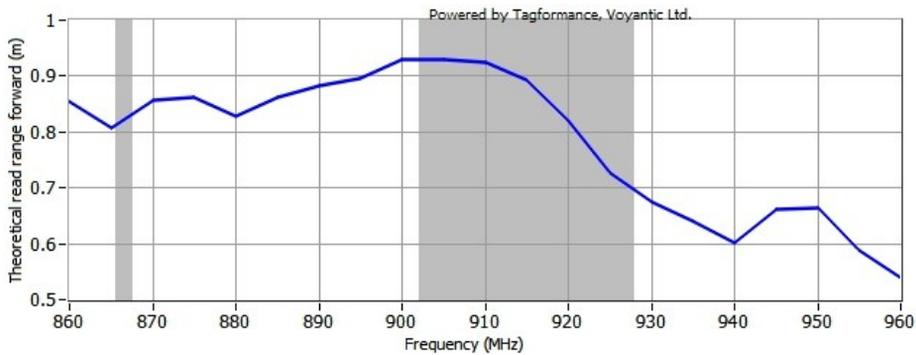

EU Test

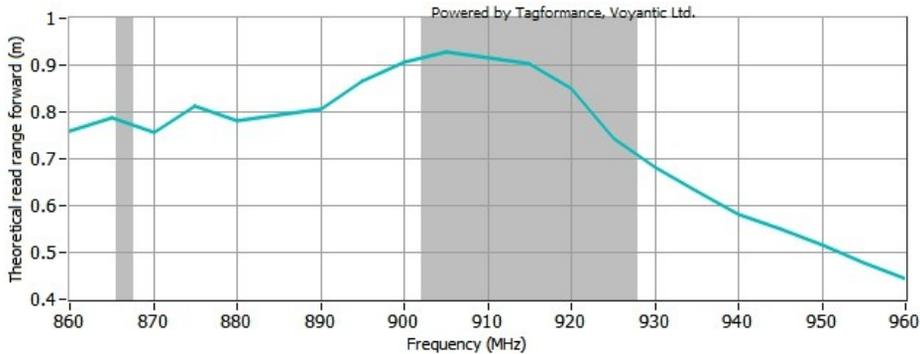

Note: Our company may optimize products in response to market changes, and any changes will be made without prior notice, please understand!



SHENZHEN INFO WISE TECHNOLOGY CO.,LTD.

Web: www.infowiserfid.com Email: sales@infowiserfid.com Tel : 153-6140-7827 office tel : 0755-21005073

Add: Address: 1101 & 1102, Building 5A, Huaqiang Creative Industry Park, Guangming Sub-district, Guangming District, Shenzhen City, Guangdong Province, P.R. China